

# RG-E5 3200Mbps Dual-band Wi-Fi 6 Mesh Route

**DATASHEET** 




#### Highlights

- Next-Gen Gigabit Wi-Fi 6 Standard
- 4x4 Enterprise-level Chipset, better stability under heavy load
- 8 Antennas and 8 Signal Amplifiers, provide whole-home network coverage
- Exclusive Reyee Mesh solution, one click to mesh up multiple Reyee Mesh devices
- Take control of your home network at your fingertips


#### Highlight Features



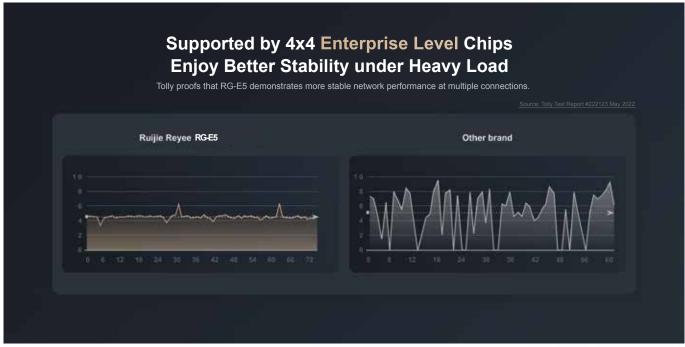

#### Highlight Features



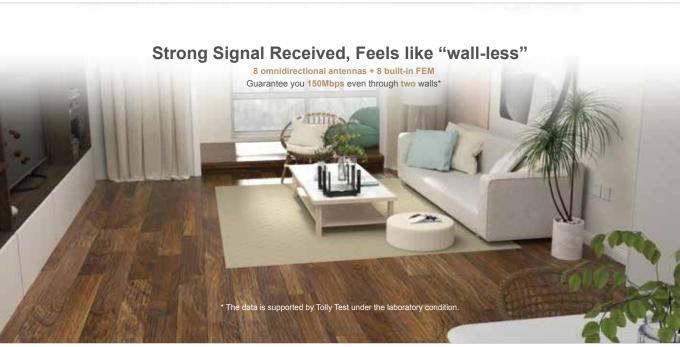


. . . . . . . . . . . . . . . . . . .

#### Highlight Features





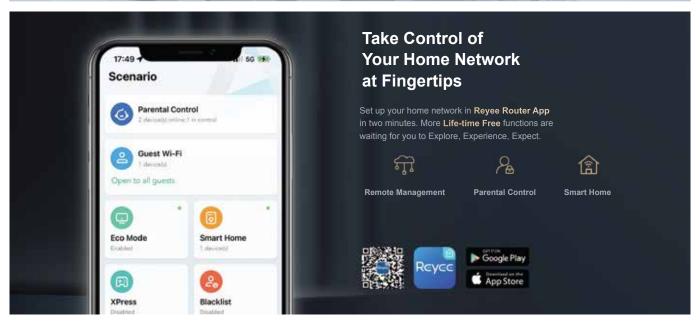

	Basic
Dimensions (W×D×H)	190 mm x 190 mm x 41 mm (7.48 in. × 7.48 in. × 1.61 in. antennas not included)
Weight	0.8 kg (packages not included)
Wi-Fi Standards	Wi-Fi 6 (802.11ax)
MIMO	2.4 GHz, 4×4, MU-MIMO 5 GHz, 4×4, MU-MIMO
Max. Wi-Fi Speed	2.4 GHz: 800 Mbps 5 GHz: 2402 Mbps
Channel Width	2.4 GHz: Auto/20/40 MHz 5 GHz: Auto/20/40/80 MHz
Antennas	8
Antennas Type	External Omnidirectional
Antenna Gain	2.4 GHz: 5 dBi 5 GHz: 6 dBi
WAN Port	1×10/100/1000 Base-T Port
LAN Ports	4×10/100/1000 Base-T Ports
Recommended Users	60
Max. Users	192
Power Supply	DC 12V/2.5A
Power Consumption	≤36W
Operation Frequency Bands	802.11b/g/n: 2.400 GHz to 2.483 GHz 802.11a/n/ac/ax: 5.150 GHz to 5.350 GHz 802.11a/n/ac/ax: 5.470 GHz to 5.725 GHz , 5.725 GHz to 5.850 GHz country-specific restrictions apply
Transmit Power	Regular: CE EIRP: ≤20 dBm (2.4 GHz) ≤27 dBm (5 GHz)
Operating Temperature	-10 °C to +45 °C (14 °F to 113 °F)
Operating Humidity	5% to 95% Noncondensing
Certifications	CE,RoHS

Wireless		
OFDMA	~	
MU-MIMO	<b>✓</b>	
BSS Coloring	~	
Maximum Number of SSIDs	6	
SSID Hiding	<b>✓</b>	
Band Steering	<b>✓</b>	
Guest Wi-Fi	~	
WPA/WPA2	<b>✓</b>	
WPA3	-	
Roaming	Layer 2 Roaming	
Blacklist	~	
Reyee Mesh	<b>✓</b>	
Mesh Pairing by Hardware	~	
Mesh Pairing by Mesh Button	<b>✓</b>	
Mesh Pairing by Eweb	~	
Recommended Hop Count	≤5	
Wi-Fi Optimization	<b>✓</b>	
QoS (WMM)	<b>✓</b>	
WPS	-	
Transmission Power Adjustment	<b>✓</b>	
Hardware		
CPU	MT7622	
Flash	16 MB	



Hardware		
RAM/SDRAM	256 MB	
Color	Black	
System LED Indicator	✓	
Reyee Mesh LED Indicator	<b>✓</b>	
Reyee Mesh Button	✓	
Power Button	-	
Reset Button	✓	
DC Connector Dimensions	5.5 mm x 2.1 mm x 11.5 mm (0.22 in. × 0.08 in. × 0.45 in. antennas not included)	
	WAN	
Static IP	<b>✓</b>	
DHCP	<b>✓</b>	
PPPoE	<b>✓</b>	
Learning PPPoE Account & Password	<b>✓</b>	
VLAN Tagging	<b>✓</b>	
	LAN	
DHCP Server	<b>✓</b>	
Client List	<b>✓</b>	
Static IP Assignment	<b>✓</b>	
Port-Based Flow Control	<b>✓</b>	
Features		
IPv6	~	
DDNS	~	
IPTV	<b>✓</b>	

	Features	
Alarm	<b>✓</b>	
Diagnosis	<b>✓</b>	
UPnP	✓	
ARP Binding	✓	
Port Mapping	✓	
DMZ Host	~	
Rate Limitation of Terminals	<b>✓</b>	
Hardware Acceleration	~	
MAC Address Cloning	✓	
Cloud Management	~	
Repeater Mode	✓	
WISP Mode	~	
	Security	
PPTP VPN Server	~	
PPTP VPN Client	<b>✓</b>	
L2TP VPN Client	-	
Parental Control	<b>✓</b>	
Protect TCP Flood Attacks	<b>✓</b>	
Protect ICMP Attacks	<b>✓</b>	
Protect UDP Flood Attacks	<b>✓</b>	
System		
Default Access/Password	192.168.110.1 No Password Required by Default	
URL Access	<b>✓</b>	

System	
Local Upgrade	<b>✓</b>
Online Upgrade	<b>✓</b>
APP Upgrade	<b>✓</b>
Syslog	-
Backup	<b>✓</b>
Factory Reset	<b>✓</b>
Language	Chinese English Vietnamese Indonesian Thai Arabic Traditional Chinese Spanish Russian

### Package Contents

Model	RG-EW3200GX PRO
Wireless Router	1
Power Adapter	1
Quick Start Guide	1
Cat5E UTP Cable	1

# Ruijie | Rcycc

Redefine your easy network



Ruijie Networks Co., Ltd Floor 11, East Wing, Zhongyipengao Plaza, No.29 Fuxing Road, Haidian District, Beijing China Website: https://www.ruijienetworks.com